


Warranty

Unless other agreements or exceptions have been made as regards for example discounts for account of warranty etc., Caféco UK shall apply the following conditions of warranty :

This machine is warranted against defective materials and/or workmanship for the period of 12 months from the date of purchase. The machine must be used according to the instructions referred in this operating manual, according to the intended use it was conceived for. Any other use is to be considered as improper and hence dangerous. This warranty does not cover damage due to accident, misuse, scale or cleaning related faults. During the length of this warranty, the customer will not have to pay for repairing or replacing of items which—on the sole option of the Caféco, the manufacture or distributor —should appear to be defective, either parts or labour. Carriages relating to shipping to and from Caféco for machine repairing and for the shipping of spare parts are excluded from this warranty. The warranty applies only if the warranty card, included with this manual, is properly and completely filled out and returned to our service department. This card must be filled out in all its parts in order to give evidence that the request is forwarded during the effective warranty period. The warranty shall be void if the machine is improperly installed, maintained, serviced or repaired by any party other than an authorised Caféco distributor, or subjected to conditions other than those recommended by the manufacturer in this manual. Damage of any kind due to transport is excluded. This warranty does not affect the statutory rights of the consumer under any applicable national laws in force nor the rights of the consumer against the distributor arising from their sales/ purchase contract. Manufactured by CYI, Chatsworth, CA and made in China.

 **Warning :** Use only genuine spare parts available from your distributor or direct from Caféco UK, at www.cafeco.co.uk/support

Your Distributor :

Caféco

Operators Manual



Blitz Milk Cooler **COOL IT**

(31-0000-04)

Congratulations !

On purchasing your new milk cooler. Please read this manual carefully and follow the instructions specified. The correct use and care will insure long life for the equipment and help avoid any hazards.

UK Support


At Caféco our goal is to insure that your new machine works perfectly right from the start and for many years to come. In case you need to replace or repair any component, please refer to your distributor or contact our support team.

Internet : www.cafeco.co.uk/support
Email : support@cafeco.co.uk
Fax : 0870 138 8171, Att. Support

Knowing your machine

Your cooler unit will keep your food or beverages nice and cold. The cooler can be used alongside your coffee machine or as a stand alone item. Included is a 240v AC adaptor, for connection to the mains power.

Machine Features

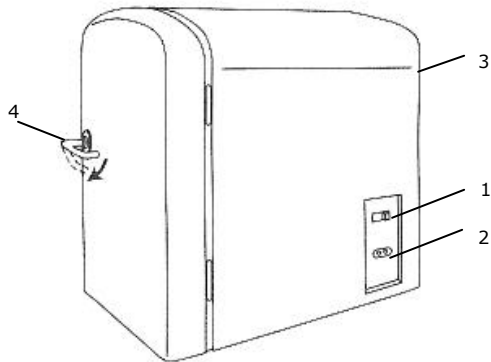

- 1 : On/Off Power Switch
- 2 : Power Inlet Socket
- 3 : Rear Cooling Vent
- 4 : Hot Water Switch
- 5 : Door Lock

Technical Data



Power : 230v 50hz 1100w 4.5amp (Via AC Adaptor Supplied)
Dimensions : 275h x 180w x 185d
Weight : 1kg



According to the council directives 89/392/CEE and 89/336/CEE and their following modifications, the blitz range complies with the essential requirements stated by the above mentioned directives.

Do's and Don't !

Read this operators manual carefully.

Do not use this appliance for anything other than its intended use.

Only use the power adaptor supplied with the cooler.

Do not immerse the appliance, power cord or plug in water or any other liquids.

Do not pull on the cooler handle, gently press down.

Make sure there rear intake vents are clear of obstructions so the air can circulate completely around your cooler.

Do not place your cooler in direct sunlight, as this will diminish the performance of the cooler.

Always unplug the machine before cleaning or maintenance.

Do not insert finger, hands or metal objects into the openings in the machine body.

Do not remove any screws from the machine

The machine does not contain any part which could be repaired by the user himself. Refer to your distributor for servicing or maintenance work.




Warning : Keep this operators manual hand for future reference

Instructions For Use

Connection



Using the adaptor supplied, plug the 12v connector into the cooler socket (2) and then other plug into a 13amp mains power socket. Switch the On/Off power switch (1) to the ON position, the red led should be lit at this point.



Make sure the cooler is not in direct sunlight and the cooling vents (3) are clear from obstruction. You should now hear the sound of the fan turning, if not check your connections and that the power is switched on at the mains socket.



Open the door, by gently pressing down on the door lock (4) as illustrated. Place your milk, food or beverage into the cooler. For best results use items that have been pre-chilled. Your cooler will begin to get cold within the first hour.



For best results use items that have been pre-chilled.